


4 COLONNE 4 COLUMNS

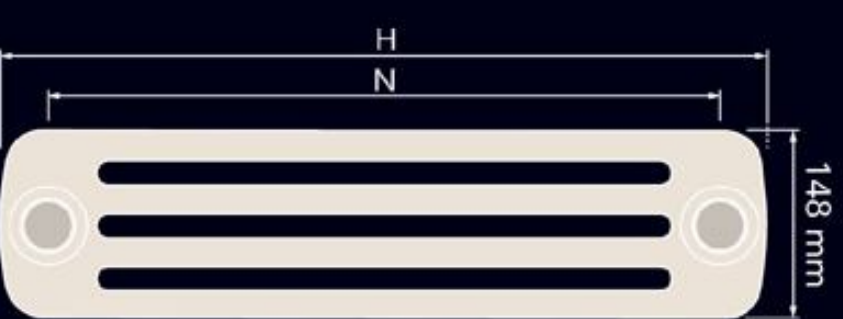

Cod. Modello Cod. Model	Altezza Height H mm	Interasse Dist. betw. centers N mm	Cont. acqua Water content lt	Peso Weight kg	Resa/Outputs EN 442-1 $\Delta t=50k$ watt/el. kcal/h-el.	K_m	Esponente n Exponent n	
CA/300	300	230	0,78	0,94	42,5	36,5	0,321	1,24910
CA/350	350	280	0,86	1,09	49,2	42,3	0,366	1,25287
CA/400	400	330	0,93	1,24	55,8	48,0	0,409	1,25664
CA/450	450	380	1,01	1,38	62,3	53,6	0,450	1,26041
CA/500	500	430	1,09	1,52	68,9	59,2	0,490	1,26417
CA/550	550	480	1,17	1,67	75,4	64,8	0,529	1,26794
CA/600	600	530	1,25	1,81	81,9	70,4	0,566	1,27171
CA/685	685	615	1,39	2,06	92,8	79,8	0,626	1,27812
CA/750	750	680	1,49	2,26	101,2	87,0	0,669	1,28302
CA/885	885	815	1,71	2,64	118,5	101,9	0,752	1,29319
CA/900	900	830	1,73	2,69	120,4	103,5	0,761	1,29432
CA/1000	1000	930	1,89	2,98	133,1	114,4	0,836	1,29604
CA/1100	1100	1030	2,05	3,27	145,8	125,4	0,910	1,29775
CA/1200	1200	1130	2,21	3,57	158,5	136,3	0,982	1,29947
CA/1500	1500	1430	2,68	4,44	196,4	168,9	1,193	1,30461
CA/1800	1800	1730	3,16	5,31	234,3	201,5	1,395	1,30976
CA/2000	2000	1930	3,48	5,88	259,6	223,2	1,548	1,30941
CA/2200	2200	2130	3,80	6,47	285,0	245,1	1,701	1,30905
CA/2500	2500	2430	4,27	7,34	323,1	277,8	1,933	1,30852
CA/2800	2800	2730	4,75	8,21	361,8	311,1	2,253	1,29819
CA/3000	3000	2930	5,07	8,79	387,5	333,2	2,403	1,29931

Lunghezza= numero elementi x 46 mm toll. +/- 1.5% - Length= number of elements x 46 mm tol. +/- 1.5%