


5 COLONNE 5 COLUMNS

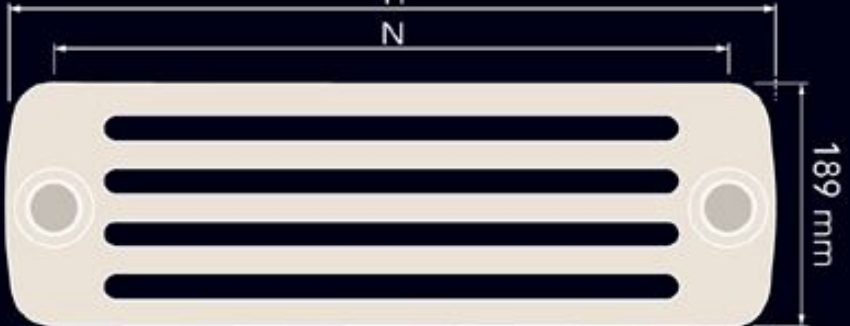

Cod. Modello Cod. Model	Altezza Height H mm	Interasse Dist. betw. centers N mm	Cont. acqua Water content lt	Peso Weight kg	Resa/Outputs EN 442-1 $\Delta t=50k$ watt/el. kcal/h-el.	K_m	Esponente n Exponent n
C5/300	300	230	0,97	1,20	51,6 44,4	0,314	1,30446
C5/350	350	280	1,07	1,38	59,5 51,2	0,364	1,30274
C5/400	400	330	1,17	1,57	67,2 57,8	0,414	1,30103
C5/450	450	380	1,26	1,75	75,0 64,5	0,465	1,29931
C5/500	500	430	1,63	1,93	82,6 71,0	0,516	1,29759
C5/550	550	480	1,46	2,11	90,2 77,6	0,567	1,29587
C5/600	600	530	1,56	2,30	97,8 84,1	0,619	1,29416
C5/685	685	615	1,73	2,60	110,6 95,1	0,708	1,29124
C5/750	750	680	1,86	2,84	120,4 103,5	0,777	1,28900
C5/885	885	815	2,13	3,32	140,5 120,8	0,924	1,28437
C5/900	900	830	2,16	3,38	142,7 122,7	0,940	1,28385
C5/1000	1000	930	2,36	3,75	157,6 135,5	1,012	1,29053
C5/1100	1100	1030	2,56	4,11	172,4 148,2	1,078	1,29720
C5/1200	1200	1130	2,76	4,47	187,3 161,0	1,141	1,30388
C5/1500	1500	1430	3,35	5,57	231,8 199,3	1,305	1,32391
C5/1800	1800	1730	3,95	6,65	276,5 237,7	1,440	1,34394
C5/2000	2000	1930	4,35	7,38	306,5 263,5	1,658	1,33420
C5/2200	2200	2130	4,74	8,11	336,7 289,5	1,892	1,32446
C5/2500	2500	2430	5,34	9,19	382,4 328,8	2,276	1,30985
C5/2800	2800	2730	5,94	10,29	429,1 369,0	2,403	1,32534
C5/3000	3000	2930	6,33	11,02	460,3 395,8	2,557	1,32744

Lunghezza= numero elementi x 46 mm toll. +/- 1.5% - Length= number of elements x 46 mm tol. +/- 1.5%